



KISA BAKLALI KALİBRE ZİNCİRLER DIN 766

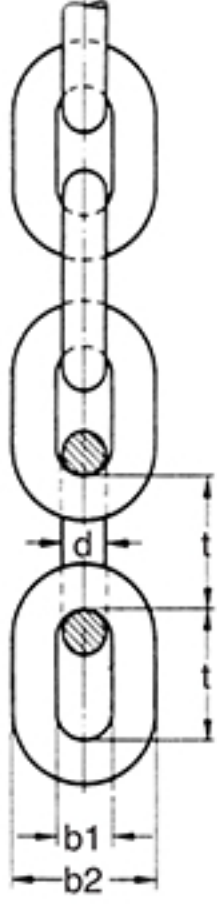


| Zincir çapı Ø mm d | İç uzunluk t | İç genişlik b1 mm | Dış genişlik b2 mm | Çalışma yükü limiti kg | Test Yükü Limiti kN min. | Kopma Yükü kN min. | Yaklaşık ağırlık kg/m | Sipariş Numarası |
|--------------------------|-----------------|-------------------------|--------------------------|------------------------------|--------------------------------|--------------------------|-----------------------------|---------------------|
| 4 | 16 | 4.80 | 13.60 | 200 | 5 | 8 | 0.32 | 04 ZKBK |
| 5 | 18.50 | 6.00 | 17.00 | 320 | 8 | 12.5 | 0.50 | 05 ZKBK |
| 6 | 18.50 | 7.20 | 20.40 | 400 | 10 | 16 | 0.80 | 06 ZKBK |
| 7 | 22 | 8.40 | 23.80 | 630 | 16 | 25 | 1.10 | 07 ZKBK |
| 8 | 24 | 9.60 | 27.20 | 800 | 20 | 32 | 1.40 | 08 ZKBK |
| 9 | 27 | 10.80 | 30.60 | 1000 | 25 | 40 | 1.80 | 09 ZKBK |
| 10 | 28 | 12.00 | 36.00 | 1250 | 32 | 50 | 2.30 | 10 ZKBK |
| 11 | 31 | 13.20 | 40.00 | 1600 | 40 | 63 | 2.70 | 11 ZKBK |
| 12 | 36 | 15.00 | 43.00 | 1750 | 44 | 70 | 3.10 | 12 ZKBK |
| 13 | 36 | 15.60 | 47.00 | 2000 | 50 | 80 | 3.90 | 13 ZKBK |
| 14 | 41 | 16.80 | 50.00 | 2500 | 63 | 100 | 4.40 | 14 ZKBK |
| 16 | 45 | 19.20 | 58.00 | 3200 | 80 | 125 | 5.80 | 16 ZKBK |
| 18 | 50 | 21.60 | 65.00 | 4000 | 100 | 160 | 7.40 | 18 ZKBK |
| 20 | 56 | 24.00 | 72.00 | 5000 | 125 | 200 | 9.00 | 20 ZKBK |
| 23 | 64 | 27.60 | 83.00 | 6300 | 160 | 250 | 12.00 | 23 ZKBK |
| 26 | 73 | 31.20 | 94.00 | 8000 | 200 | 320 | 15.00 | 26 ZKBK |

DIN 5685 TİCARİ KALİTE ZİNCİRLER

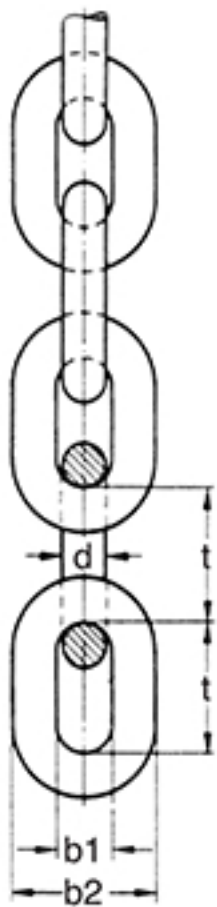

| Zincir çapı Ø mm d | İç uzunluk t | İç genişlik b1 mm | Dış genişlik b2 mm | Yaklaşık ağırlık kg/m | Sipariş Numarası |
|--------------------------|-----------------|-------------------------|--------------------------|-----------------------------|---------------------|
| 3 | 16 | 12 | 20 | 0.15 | 03 ZT |
| 4 | 19 | 16 | 26 | 0.27 | 04 ZT |
| 5 | 21 | 20 | 32 | 0.43 | 05 ZT |
| 6 | 24 | 24 | 38 | 0.63 | 06 ZT |
| 7 | 28 | 28 | 44 | 0.86 | 07 ZT |
| 8 | 32 | 32 | 50 | 1.10 | 08 ZT |
| 10 | 40 | 40 | 62 | 1.75 | 10 ZT |
| 12 | 48 | 48 | 75 | 2.55 | 12 ZT |
| 14 | 50 | 52 | 80 | 4.10 | 14 ZT |
| 16 | 63 | 54 | - | 5.15 | 16 ZT |

DIN 22252 - 1 MADEN OCAKLARINDA KULLANILAN KONVEYÖR ZİNCİRLERİ

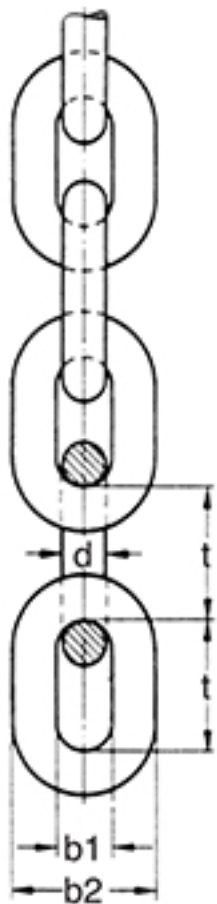

| Zincir çapı Ø mm d | İç uzunluk t | İç genişlik b1 mm | Dış genişlik b2 mm | Test Yükü Limiti kg max. | Kopma Yükü kg min. | Yaklaşık ağırlık kg/m | Sipariş Numarası |
|--------------------------|-----------------|-------------------------|--------------------------|--------------------------------|--------------------------|-----------------------------|---------------------|
| 14 | 50 | 17 | 48 | 150 | 190 | 4.00 | 14 ZM |
| 18 | 64 | 21 | 60 | 260 | 320 | 6.60 | 18 ZM |
| 22 | 86 | 26 | 74 | 380 | 480 | 9.50 | 22 ZM |
| 24 | 86 | 28 | 19 | 460 | 570 | 11.60 | 24 ZM |
| 26 | 92 | 30 | 86 | 540 | 670 | 13.70 | 26 ZM |