


TS EN 12385 - DIN 3052


TS 1918 / 1

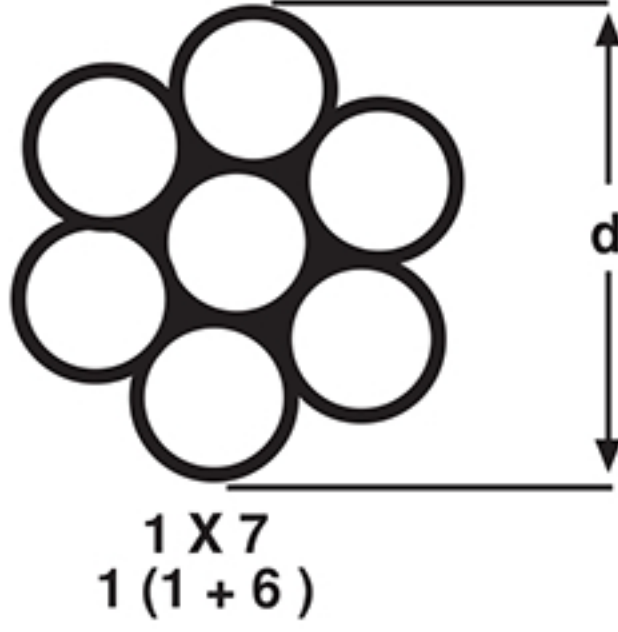

HALAT ÇAPI	ÜRÜN	BİRİM AĞIRLIK	EN KÜÇÜK KOPMA KUVVETİ 180 kgf/mm <sup>2</sup>
d (mm)	KODU	kg/m ~	
0,6	0,6 MNGC 1x7	0,002	35
0,8	0,8 MNGC 1x7	0,003	63
1,0	1,0 MNGC 1x7	0,005	99
1,5	1,5 MNGC 1x7	0,011	221
2,0	2,0 MNGC 1x7	0,020	392
2,5	2,5 MNGC 1x7	0,031	613
3,0	3,0 MNGC 1x7	0,045	882
3,5	3,5 MNGC 1x7	0,061	1206
4,0	4,0 MNGC 1x7	0,080	1570
4,5	4,5 MNGC 1x7	0,102	1980
5,0	5,0 MNGC 1x7	0,126	2450
6,0	6,0 MNGC 1x7	0,181	3530
7,0	7,0 MNGC 1x7	0,246	4800
8,0	8,0 MNGC 1x7	0,321	6270
9,0	9,0 MNGC 1x7	0,407	7940
10,0	10 MNGC 1x7	0,502	9800
12,0	12 MNGC 1x7	0,723	14100
14,0	14 MNGC 1x7	0,984	19200
16,0	16 MNGC 1x7	1,290	25100

TS EN 12385 - DIN 3052

TS 1918 / 2

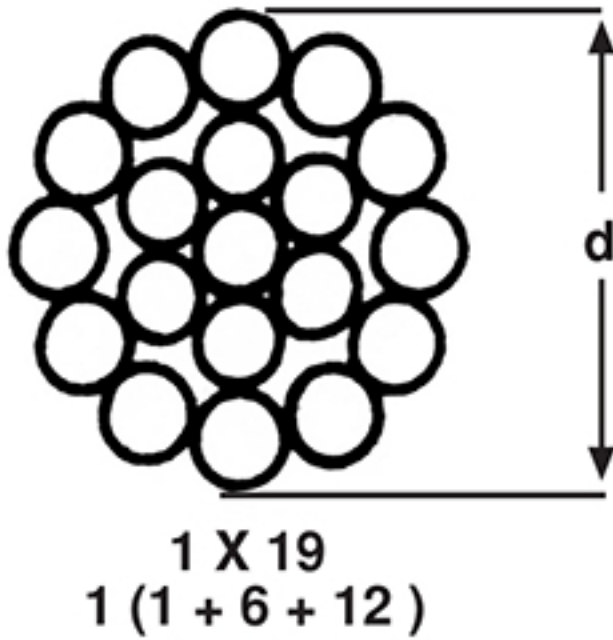

HALAT ÇAPI	ÜRÜN	BİRİM AĞIRLIK	EN KÜÇÜK KOPMA KUVVETİ 180 kgf/mm <sup>2</sup>
d (mm)	KODU	kg/m ~	
1,0	1,0 MNGC 1x19	0,005	95
1,5	1,5 MNGC 1x19	0,011	213
2,0	2,0 MNGC 1x19	0,019	378
2,5	2,5 MNGC 1x19	0,031	591
3,0	3,0 MNGC 1x19	0,044	851
3,5	3,5 MNGC 1x19	0,060	1160
4,0	4,0 MNGC 1x19	0,079	1510
5,0	5,0 MNGC 1x19	0,124	2360
6,0	6,0 MNGC 1x19	0,178	3400
7,0	7,0 MNGC 1x19	0,243	4630
8,0	8,0 MNGC 1x19	0,317	6050
10,0	10 MNGC 1x19	0,495	9450
12,0	12 MNGC 1x19	0,713	13600
14,0	14 MNGC 1x19	0,971	18500
16,0	16 MNGC 1x19	1,270	24200
18,0	18 MNGC 1x19	1,610	30600
20,0	20 MNGC 1x19	1,980	37800
22,0	22 MNGC 1x19	2,400	45700
24,0	24 MNGC 1x19	2,850	54400