




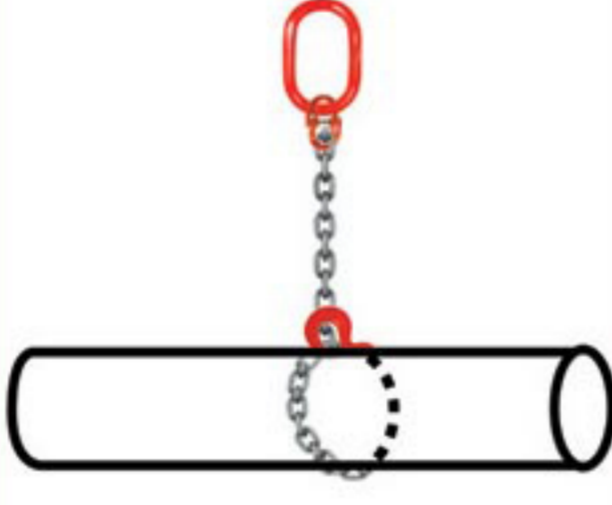
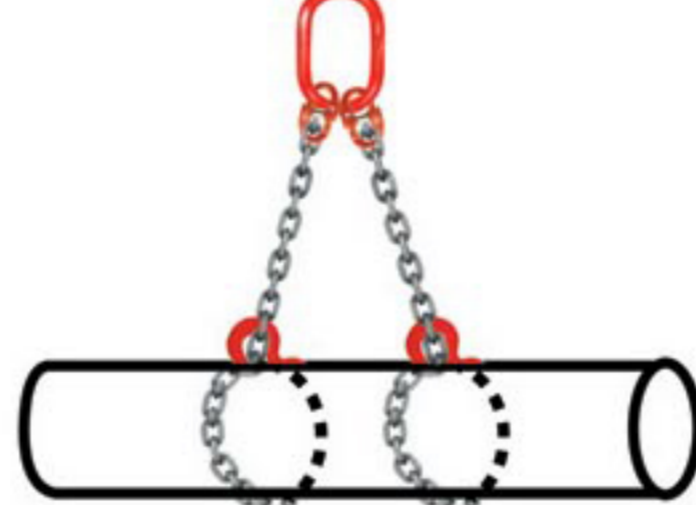
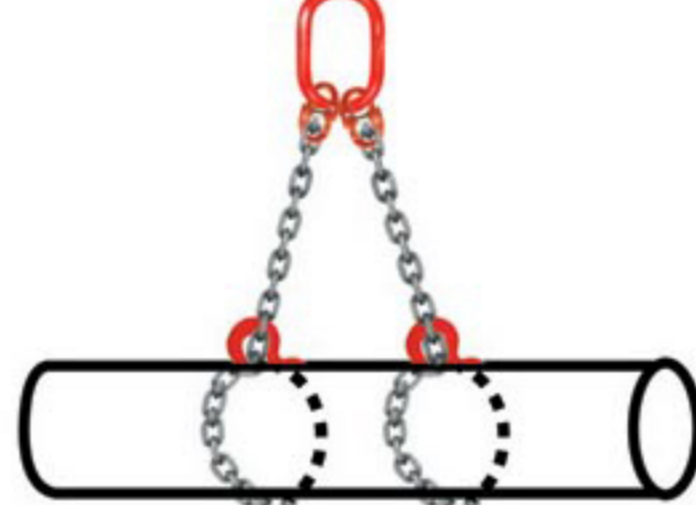




ZİNCİR SAPANLARIN GÜVENLİ ÇALIŞMA DEĞERLERİ
EMNİYET KATSAYISI 1:4
TEK ve ÇOK BACAKLI ZİNCİR SAPANLAR EN 818 - 2
KALİTE SINIFI 8

Grade 80	1 Bacaklı	2 Bacaklı		3 ve 4 Bacaklı	
					
Eğim Açısı ▶	0	0-45	45-60	0-45	45-60
Yük Faktörü ▶	1	1.4	1	2.1	1.5
Zincir Çapı mm ▼	kg	kg	kg	kg	kg
6	1120	1600	1120	2360	1700
7	1500	2120	1500	3150	2240
8	2000	2800	2000	4250	3000
10	3150	4250	3150	6700	4750
13	5300	7500	5300	11200	8000
16	8000	11200	8000	17000	11800
18	10000	14000	10000	21200	15000
19	11200	16000	11200	23600	17000
20	12500	17000	12500	26500	19000
22	15000	21200	15000	31500	22400
26	21200	30000	21200	45000	31500

Grade 80	1 Bacaklı Boğdurma	2 Bacaklı Boğdurma		1 Bacaklı Sonsuz Sepet Sapan	
					
Eğim Açısı ▶	0	0-45	45-60	0-45	45-60
Yük Faktörü ▶	0.80	1.4	1	2.1	1.5
Zincir Çapı mm ▼	kg	kg	kg	kg	kg
6	900	1250	900	1250	900
7	1250	1700	1250	1700	1250
8	1600	2240	1600	2240	1600
10	2500	3350	2500	3350	2500
13	4250	5600	4250	5600	4250
16	6300	9000	6300	9000	6300
18	8000	11200	8000	11200	8000
19	9000	12500	9000	12500	9000
20	10000	14000	10000	14000	10000
22	11800	17000	11800	17000	11800
26	17000	23600	17000	23600	17000